



## NOTES:

- 1. ALL DIMENSIONS IN MILLIMETRES.
- 2. KERB RAMP TO COMPLY WITH AS1428.1.


  3. REFER AS1428.4 FOR THE INSTALLATION OF TACTILE DEVICES WHERE FOOTPATH IS WIDER THAN 4500 OR WHERE THE RAMPS ARE INSTALLED MID BLOCK.
- 4. ALL CONCRETE TO BE MINIMUM 25MPa.
- 5. BROOM FINISH ON RAMP.
- 6. NO LIP TO BE PLACED AT GUTTER LINE.
  7. DIRECTION OF KERB RAMP MUST BE ALIGNED TO THE CORRESPONDING RAMP ON THE OPPOSITE SIDE OF THE ROAD.

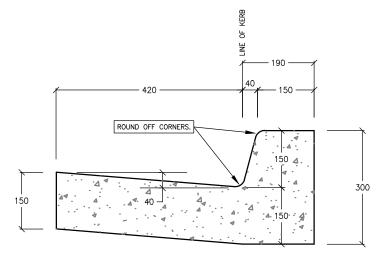

SECTION B-B
TYPICAL KERB & GUTTER PROFILE: BARRIER TYPE SCALE 1:10

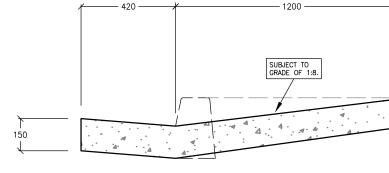

SECTION C-C TYPICAL PRAM RAMP CROSS SECTION SCALE 1:10

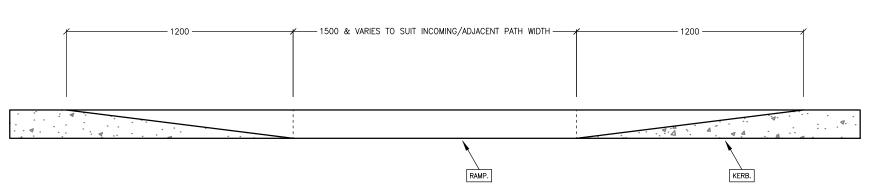

SECTION A-A
TYPICAL PRAM RAMP ELEVATION FOR BARRIER KERB & GUTTER SCALE 1:10

CONSULTANT			DESCRIPTION	INITIALS	DATE	S
		Α	ISSUED FOR APPROVAL	DMM/LW	06-98	ĺ
		В	DRAFTING UPDATES	-	-	ĺ
		С	RAMP SECTION WIDENED FROM 1200 TO 1500	MC	08-08-17	
		D	NOTE & DRAFTING UPDATES	MC	21-09-23	
		E	RAMP WIDTH DIMENSIONS UPDATED	MC	26-02-24	
CHECKED	APPROVED					

CALES (A	(1)											
1:10	0	0.1	0.2	0.3	0.4	0.5 Metres	1:200	2	4	6	8	10 Met
1:20	0	_			8.0		1:500	5		15		25
	0	0.5	1.0	1.5	2.0	2.5		7.5	15	22.5	30	37.5
1:100	0	1	2	3	4	5	0	10	20	30	40	50
1.100							1:1000					

	SURVEYED	-	CHECKED
letres	DRAWN	мс	
	DESIGN	_	TECHNICAL SERVICES MANAGER
	DATE	26-02-24	DIRECTOR ENGINEERING SERVICES
	DATUM	AHD	
			•

1
BATHURST 3
REGIONAL COUNCIL

PROJECT								
В	RC STA	NDARD PE	RAMBULATOR					
CROSSING DETAILS								
DESCRIPTION PLAN & SECTIONS								
DWG No.		SHFFT No.		RFV.				
EN78	377	SHEET NO.	01	I KEV.	Ε			